
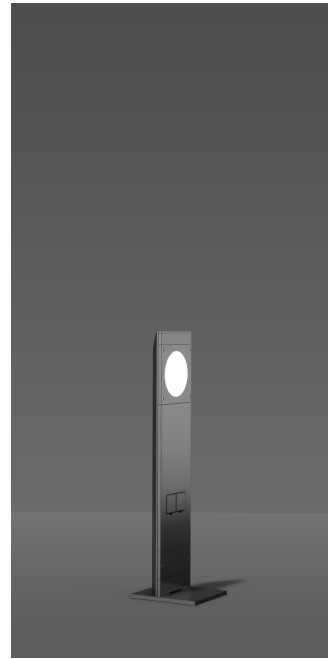



Slopia 0'Top

611871.0031.1 | Bollards

Pathway luminaires
4051859042853
LED
L 270, B 240, H 970



LED pathway luminaire in an exquisite design. Straight upright column made of aluminium profiles with modular inserts. Covers and ground-plate made of corrosion-resistant aluminium pressure die-cast for outdoor use, powder coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Module with LED and cover in opal glass. Symmetrical light distribution. Integral driver. Mains connection box inside housing profile for max. 2 x 5 x 1,5 mm². Max. cable diameter: 13 mm. Double Schuko socket with flap cover (IP 44) integrated in the post.

Electrical

Control gear	Converter not necessary
Voltage	220 - 240 V / 50 - 60 Hz
System power	17 W
Luminaire efficacy	49 lm/W

Approbations

Type of Protection	IP 44
Protection Class	I
Glow Wire Test	650°C - 30 seconds
Impact Protection	IK08 (5 Joule)
Safety marks	F-mark
Trade mark	CE
Energy efficiency class LED	A+
Energy class of included lamp	A+

Colour

Colour anthracite metallic

Dimensions

Length L	270 mm
Width B	240 mm
Height H	970 mm
Weight	11 kg

Lamp

Lamp	LED
Colour temperature	4000K
Colour rendering index (CRI)	80
Colour consistency (McAdam)	3
Lifetime	48000 h (L70/B10)
Photobiological safety according to EN 62471	Risk group 1

Lighting technology

Colour temperature	4.000 K
Rated luminous flux	820 lm
Glare evaluation UGR (4H 8H) 1	24,9
Beam angle	114°