

INSTRUCTION



48-2016




Flat Polymero

311945.002.2.76

IP 40 IK10
 220 - 240 V / 50 - 60 Hz
 LED
 5 x 1,5 mm²
 2,50 mm²

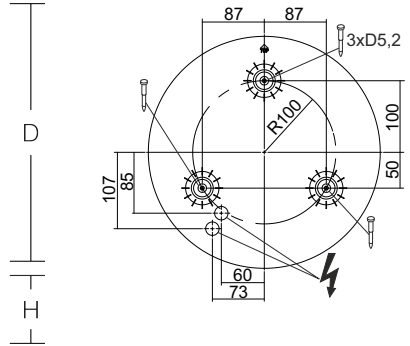

311945.002.2.76	D 360, H 100	LED	13,5 W	1,28 kg
Φ	EEL _{LED}	EEL	CRI	CCT
1150 lm	A+	A+	83	3000K
B10	B16	C10	C16	I max / I max/2 / T50
114	182	114	182	0,1 A










Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464

EN 12464

RZB
Rudolf Zimmermann,
Bamberg GmbH
 Rheinstraße 16
 D-96052 Bamberg
 Deutschland
 Telefon +49 951/79 09-0
 Telefax +49 951/79 09-198
 www.rzb.de
 info@rzb-leuchten.de

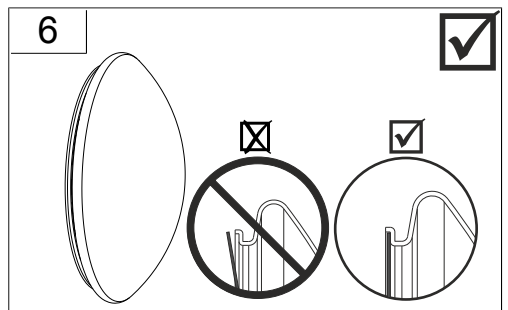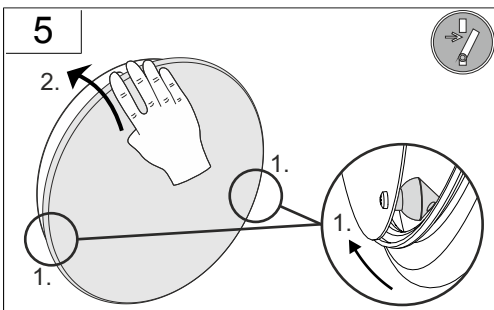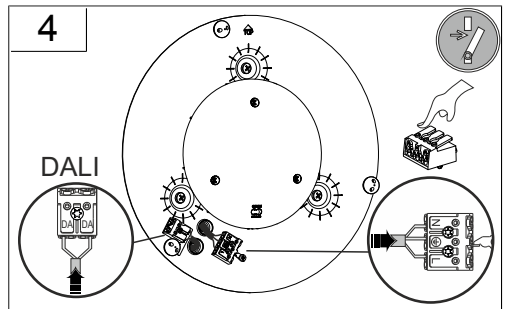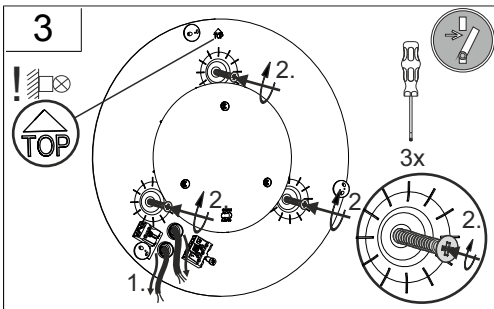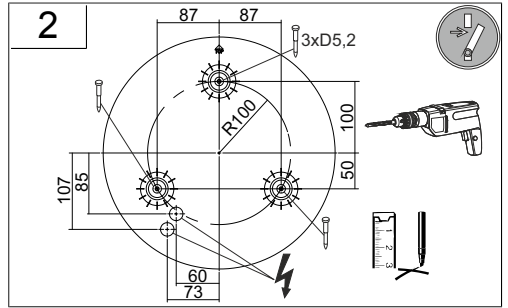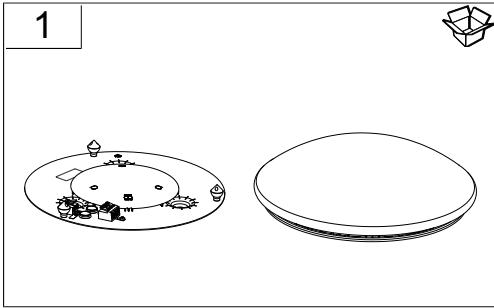

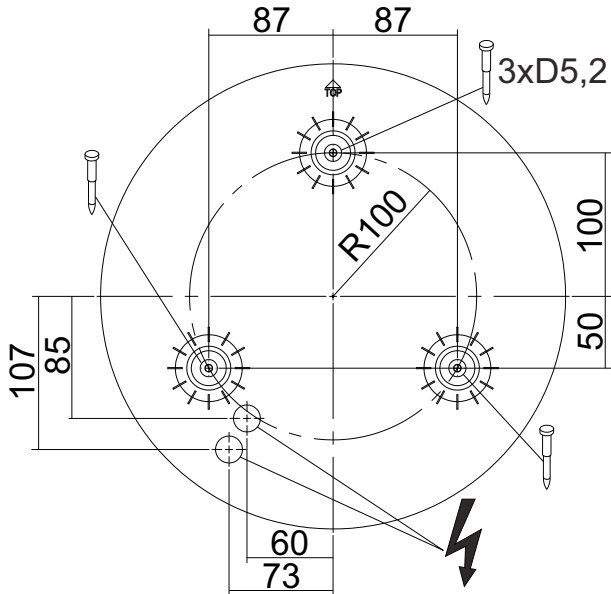












DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

	 +		
	981804.002	D 380, H 19	351 g
	981804.004	D 380, H 19	351 g
	981804.0042	D 380, H 19	340 g

	 		
	08-311161.022	Ersatzdiffusor PC D 360	200 g