
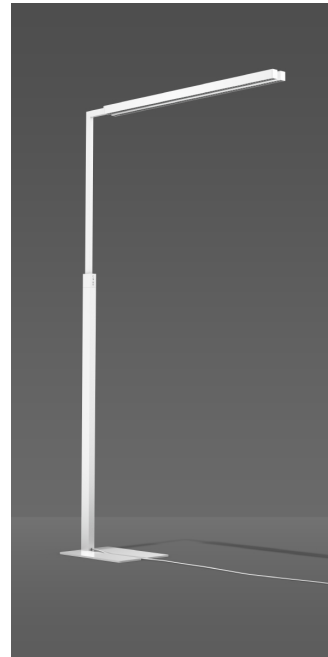



Less is more 27

312279.002.1 | Free-standing luminaires

Free-standing luminaires
4051859270584
LED
L 1170, B 340, H 2033



LED free-standing luminaires for single and double workplaces with extremely narrow luminaire head. Flat steel base plate for high stability and space-saving positioning with office furniture. Top and column made of aluminium. Pushbutton ergonomically integrated in the luminaire column. Luminaire powder coated. Luminaire top 2x (L 1013 x W 28 x H 37 mm). Base plate (450 x 340 mm) with wide opening (150 mm). Asymmetrical light distribution for high degree of uniformity in the workplace. Direct 60%, indirect 40% light emission. Direct light control via aluminium micro-grid in smooth finish. Indirect light control via satin-finish plastic diffuser in non-yellowing PMMA. Luminaire switchable/dimmable separately. Version with intelligent presence control and brightness sensors. Integral driver located inside the column. With 2 m connection cable including safety plug (Schuko).

Colour

Colour white

Dimensions

Length L 1.170 mm
Width B 340 mm
Height H 2.033 mm
Weight 10,5 kg

Lamp

Lamp LED
Colour temperature 4000K
Colour rendering index (CRI) 80
Colour consistency (McAdam) 3
Lifetime 60000 h (L80/B10)
Photobiological safety according to EN 62471 Risk group 1

Lighting technology

Colour temperature 4.000 K
Rated luminous flux 9.150 lm
Glare evaluation UGR (4H 8H) 1 20,8
Beam angle 30° / 45° / 30° / 30°

Electrical

Control gear Touch-Dim converter
Control gear 2 Constant voltage supply
Voltage 220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse 5
Luminaires on B16A fuse 9
Luminaires on C10A fuse 9
Luminaires on C16A fuse 15
Inrush current / inrush current duration 34 A / 385 µs
System power 92 W
Luminaire efficacy 100 lm/W

Approbations

Type of Protection IP 20
Protection Class I
Glow Wire Test 650°C - 30 seconds
Impact Protection IK02 (0,20 Joule)
Safety marks F-mark
ULOR 45,7 %
Trade mark CE
CIE Flux Code / CEN Flux Code 81 99 100 54 100
Energy efficiency class LED A++
Energy class of included lamp A++